

# HINIKER

PROFESSIONAL PERFORMANCE  
PROFESSIONAL STRENGTH  
PROFESSIONAL RESULTS

PRODUCT  
CATALOG



TORSION-TRIP  
SCOOP-PLOW



STAINLESS STEEL  
TILT-LIFT PLOWS



TRIP-EDGE  
C-PLOWS



SKID-STEER  
SNOW PUSHER



SAND & SALT  
SPREADERS





# Hiniker *Innovation*



Hiniker plows are built with one thing in mind—moving snow in the most efficient way possible! Check out the wide range of innovative designs on the following pages and find the perfect match for your plowing operation, whether it's a single plow or an entire fleet.

Hiniker plows are designed with the commercial plower in mind and our robust construction shows it. From the durable compression or torsion-type trip springs, to the reinforced moldboard frames, to the Quick-Hitch 2 attachment system, Hiniker plows are built to work.


Hiniker works to make the operator's experience as pleasant as possible. Hook-ups are a snap with the Hiniker Quick-Hitch and Quick-Hitch 2 systems. The compact joystick controller is unsurpassed for convenience and simplicity. Super-bright quad composite halogen headlights light your way while trip-edge or trip moldboard systems smooth the ride and protect your investment.

## Table of Contents

- 2-3 Introduction
- 4-5 Torsion-Trip V-PLOW
- 6-7 Torsion-Trip SCOOP PLOW
- 8-9 C-PLOW
- 10-11 Conventional 2000
- 12 1700 Series - Tilt-Lift
- 13 700 Series - Mid-Size
- 14-15 Conventional 7000
- 16-17 Stainless Steel Tailgate Spreaders
- 18-19 Auger Spreaders
- 20-21 Conveyor Spreaders
- 22-23 Accessories
- 24-25 Skid Steer Plows
- 26 Skid Steer Snow Pusher
- 27 Loader Snowplows
- 28 Specifications







## **QUICK-HITCH<sup>2</sup>**

The Hiniker Quick-Hitch is the fastest plow mounting system available. The self-aligning drive-in mount lets you connect your Hiniker plow in seconds. This eliminates manually lifting, pushing, and pulling the plow into place.



## **Super-bright quad halogen headlights**

have up to twice the power of typical sealed beam lamps. These headlights help create a high visibility, high illumination working area, which improves overall operator and motorist safety.

The quad halogen headlights also feature an advanced reflector array that maximizes brightness and increases beam pattern and range. Wrap-around turn signal lamps help increase visibility from all angles. Get maximum visibility for added safety, and better, faster plowing operations.



# **High-Performance Trip-Edge Plows**



## **Heavy-Duty Poly Moldboard**

All Hiniker 6000/7000/8000/9000 Series plows use a high-density polyethylene moldboard that allows snow to flow easily for more efficient plowing. Plus, it's dent-resistant and corrosion-free.



## **Horizontal-Truss Moldboard Frame**

The horizontally trussed structure of the moldboard provides exceptional resistance to bending and bowing, for extra heavy-duty applications. Laser-cut steel ribs add exceptional strength.



## **Split Trip-Edge**

Each section of the trip-edge operates independently of the other, reducing stress and twisting forces on the plow.  
*(8000 Series Shown)*

# HINIKER *Torsion-Trip V-PLOW*

9300 SERIES

Moldboards flare out from 30 inches high at center to 37 inches (8½' plow) or 38 inches (9½' plow). The high curve corrosion-proof and dent-resistant HDPE plow surface reduces friction for better snow flow resulting in more efficient plowing. Optional rubber or polyethylene snow deflectors available.

Wrap-around curb guards with chrome-alloy wear-bars provide protection from premature wear and damage.

## Solid Performance in a Torsion Trip-Edge Plow

Double-acting hydraulic cylinders hold wings securely in position, even while backdragging.

Chrome-alloy wear-bars for extended cutting edge life.

Top-quality design, construction, and components in a contractor-duty plow.

Simple, reliable torsion-trip edge provides independent protection to each plow wing.

## *Strength, Capacity, and Versatility*

The new Hiniker 9300 Series Torsion-Trip V-Plows offer the versatility that only a V-Plow can, along with the strength and operator convenience that you've come to expect from Hiniker. Deep-curl flared wings cast deep snow farther and higher, while providing more scoop capacity than ever.



# V-PLOW



**Convenient Command**  
of all V-plow functions:  
Scoop, Vee, Angle Right,  
Angle Left, Raise and Lower.



One pass plowing . . . no problem!  
**Hiniker's pitch adjustment** levels the blade to assure full ground contact for optimum cleaning efficiency.



**High-performance power units** provide quick response & long-term reliability.

- Available in 8.5 and 9.5 ft. widths.
- Customizable with optional skid shoes, wing kits, and snow deflectors.

## V-PLOW Specifications:

MODEL	9385	9395
BLADE WIDTH	8½'	9½'
CUTTING WIDTH	V-POSITION	93"
	SCOOP	84"
	STRAIGHT	102"
	ANGLE	88"
MOLDBOARD HEIGHT	30-37"	30-38"
MOLDBOARD SURFACE	¼" HMW poly	
TRIP SPRINGS	6	
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	797 lb.	830 lb.




**PUT SNOW IN ITS PLACE**



# HINIKER *Torsion-Trip SCOOP PLOW*

6000 SERIES

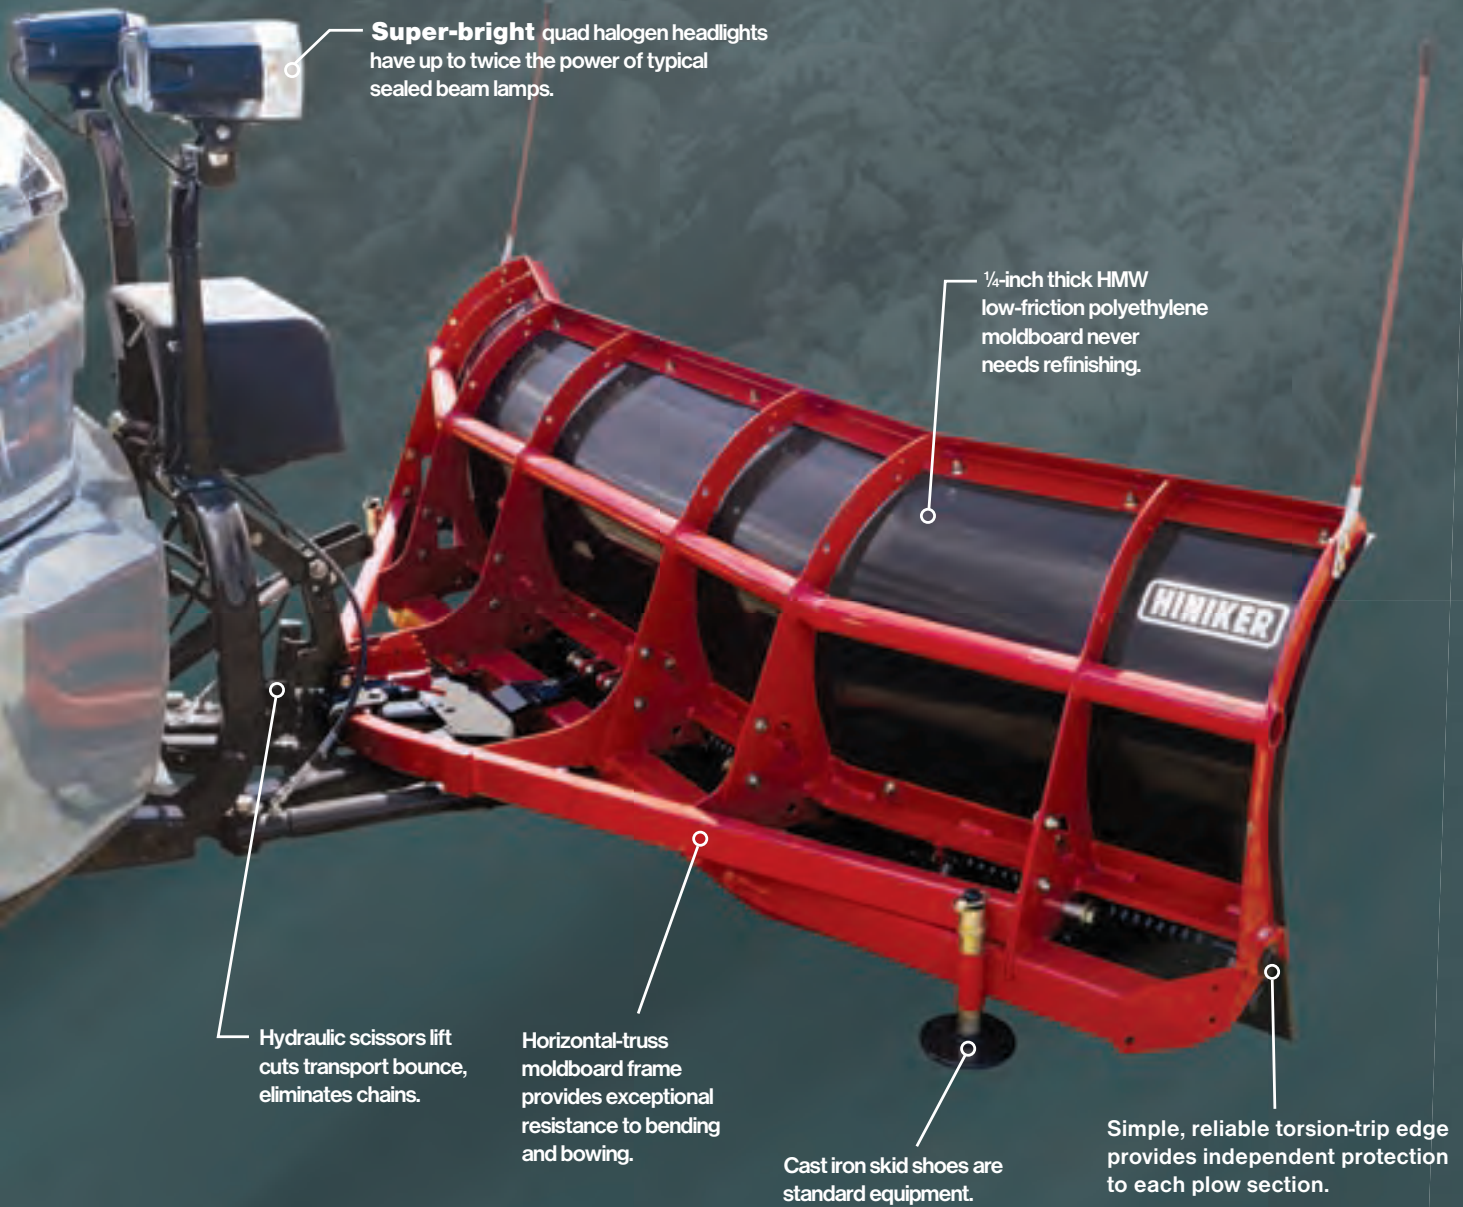

Super-bright quad halogen headlights have up to twice the power of typical sealed beam lamps.

¼-inch thick HMW low-friction polyethylene moldboard never needs refinishing.

Hydraulic scissors lift cuts transport bounce, eliminates chains.

Horizontal-truss moldboard frame provides exceptional resistance to bending and bowing.

Cast iron skid shoes are standard equipment.

Simple, reliable torsion-trip edge provides independent protection to each plow section.

## The *ULTIMATE* Parking Lot Plow

Move snow more efficiently with a Hiniker trip-edge Scoop plow. The unique concave shape captures snow, providing greater capacity, less spillage, and faster, more efficient clean-up—plus the protection of a full width, three-section, high-clearance trip-edge.



# SCOOP

- 20° Fixed-angle outer ends
- Conventional plow weight and simplicity
- V-Plow capacity and efficiency
- Fixed-end plow simplicity



The ability of the Hiniker Scoop plow to angle full right or full left for conventional plowing, combined with the outer end's 50-degree forward angle, significantly reduces high-side spillage. The Scoop plow is ideal for parking areas and large lots where high-capacity, high-efficiency plowing is essential.



The Hiniker Scoop's concave shape captures more snow than other plow designs. Its concave design and fixed-end simplicity provides operators an effective and efficient plow for a wide range of applications.

## SCOOP Specifications:

MODEL	6812	6912
BLADE WIDTH	8'	9'
BLADE HEIGHT	30"	30"
MOLDBOARD SURFACE	¼" HMW Poly	¼" HMW Poly
VERTICAL RIBS	6	8
TORSION TRIP SPRINGS	8	8
POWER ANGLING RAMS	1½" x 10"	1½" x 10"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	749 lb.	803 lb.



**PUT SNOW IN ITS PLACE**



# HINIKER **C-PLOW**

8000 SERIES

30-inch tall, high curve, high-density polyethylene moldboards are dent-resistant and corrosion-free. Snow flows easily for more efficient plowing.

**PUSH**

9"

**Super-bright** quad halogen headlights have up to twice the power of typical sealed beam lamps.

Pinch-free pivot point is 9 inches above the surface providing protection from higher obstacles such as curbs and parking barriers.

**PULL**

The high-tensile steel superstructure of the moldboard provides exceptional resistance to bending and bowing, for extra heavy-duty applications. 10 laser-cut steel ribs add exceptional strength.

Long-lasting cast ductile-iron skid shoes.

## **Move More Snow FASTER**

The Hiniker C-plow offers all of the heavy-duty performance of a conventional plow plus the added versatility of a high performance backdrag plow. Plow loading docks, residential driveways and congested parking areas faster than ever. The patented Hiniker C-Plow blade actually converts from a conventional plow into a backdrag plow with the push of a button, letting you remove snow quickly and easily from garage aprons, curbs, loading docks, and tight corners. Then touch a button again to flip the blade upright and push the snow away.




# C-PLOW

- **Exclusive high pivot-point trip-edge**
- **Super-bright quad halogen lights**
- **Converts from a conventional plow to a backdrag plow with the push of a button**



The compact joystick control puts full control of all plow functions in the palm of your hand.



**High-clearance** split trip-edges operate independently of one another, reducing stress and twisting forces on the plow.

**PUSH**



**PULL**



## C-PLOW Specifications:

MODEL	8802	8902
BLADE WIDTH	8'	9'
BLADE HEIGHT	30"	
MOLDBOARD SURFACE	¼" HMW poly	
VERTICAL RIBS	10	
COMPRESSION TRIP SPRINGS	4	
PLOW WIDTH @ 30° ANGLE	83"	93"
TOP CUTTING EDGE (HIGH CARBON 1084 STEEL)	¼" x 4"	
LOWER CUTTING EDGE (HIGH CARBON 1084 STEEL)	⅜" x 6"	
TRIP PIVOT POINT HEIGHT	9"	
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	800 lbs.	835 lbs.




**PUT SNOW IN ITS PLACE**



# HINIKER *Conventional*

2000 SERIES

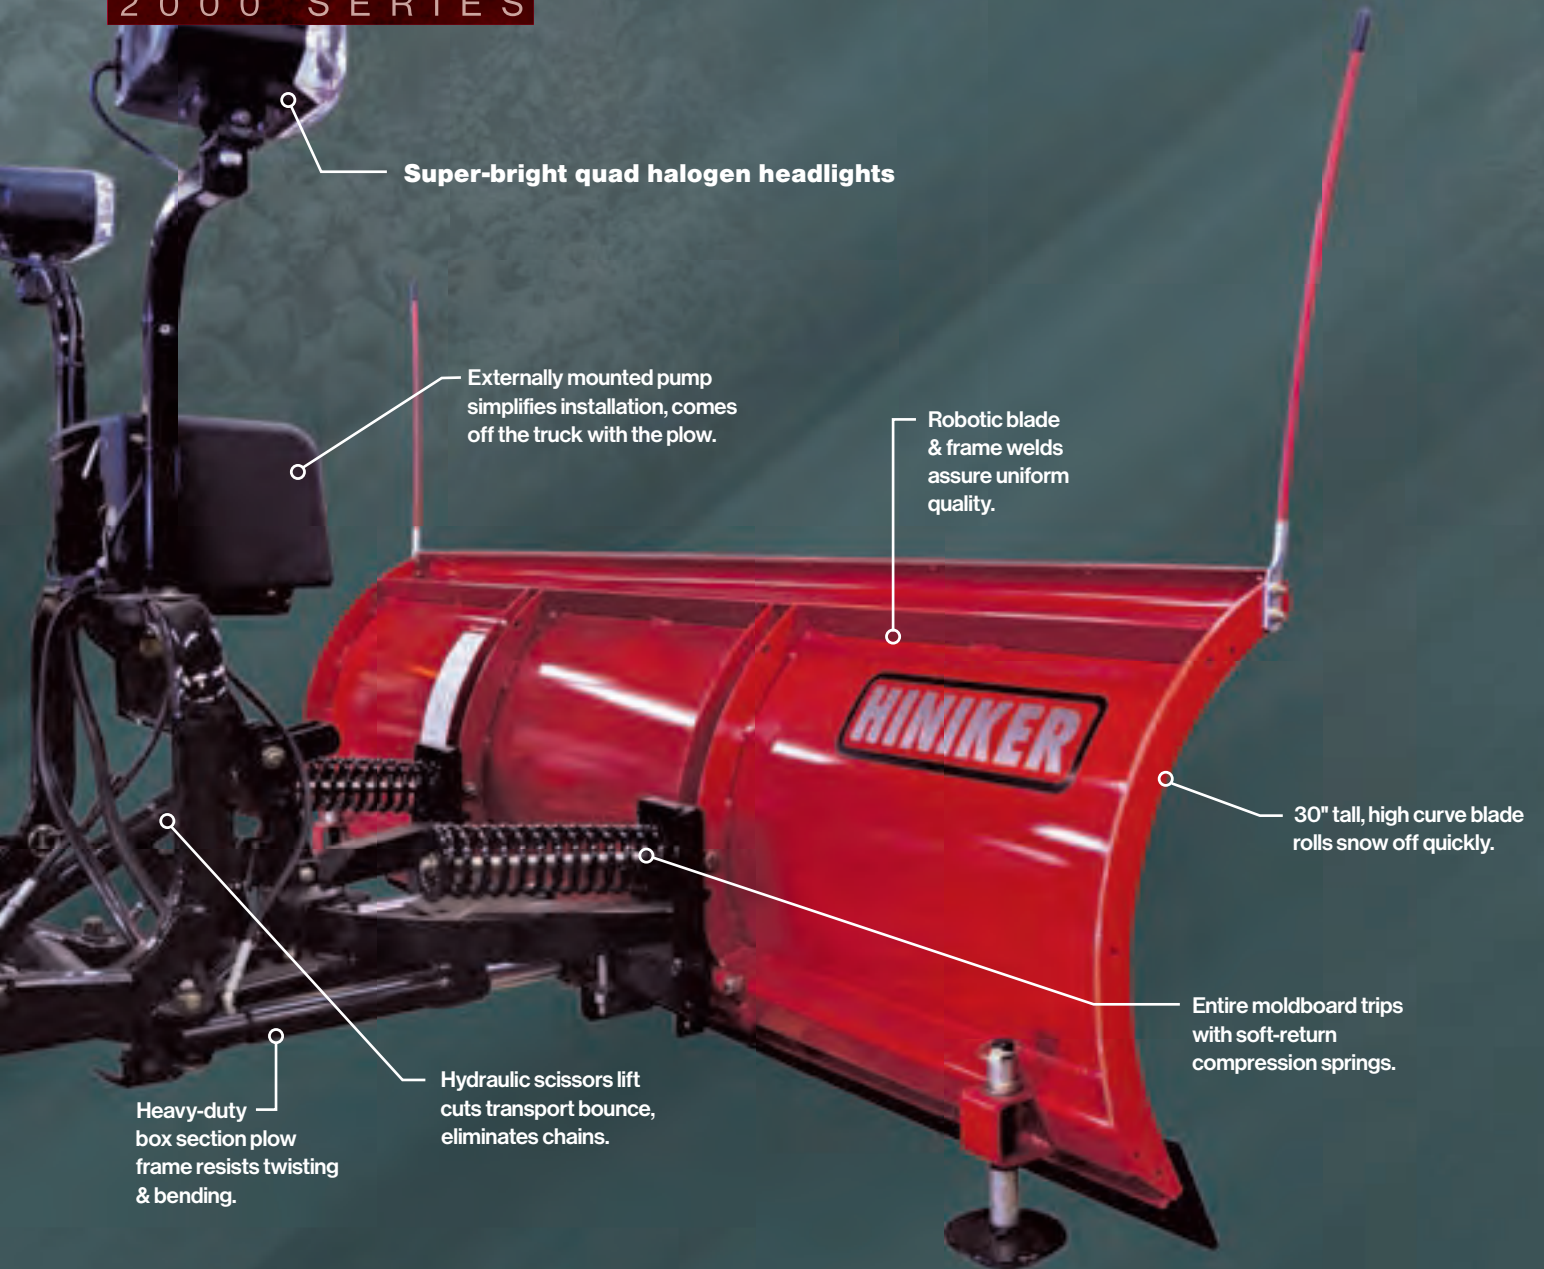

Super-bright quad halogen headlights

Externally mounted pump simplifies installation, comes off the truck with the plow.

Robotic blade & frame welds assure uniform quality.

30" tall, high curve blade rolls snow off quickly.

Entire moldboard trips with soft-return compression springs.

Hydraulic scissoring lift cuts transport bounce, eliminates chains.

Heavy-duty box section plow frame resists twisting & bending.

## Get *Professional Performance* With Hiniker Straight Blade Plows

Take a professional approach to snow removal! Hiniker 2000 Series full-trip snowplows use box section frames and heavily reinforced moldboards for strength and durability. 30 inch tall high-curve moldboards move heavy snowfalls quickly. Our hydraulic scissoring lift reduces transport bounce and bang. Convenient compact joystick controls can be mounted anywhere or held in the palm of your hand. And the Hiniker Quick-Hitch mounting system is one system that truly lives up to its name. Count on Hiniker's proven performance—the professionals choice!





**Polyethylene snow deflector** (optional) provides a slick surface for smooth snow flow.



**Progressive action full-trip design** activates compression springs for trouble free performance.

## CONVENTIONAL PLOW *Specifications:*

MODEL	2753	2803	2853
BLADE WIDTH	7 1/2'	8'	8 1/2'
BLADE HEIGHT	30"	30"	30"
GAUGE OF STEEL	12GA	12GA	12GA
VERTICAL RIBS	6	6	8
COMPRESSION TRIP SPRINGS	2	2	4
PLOW WIDTH @ 31° ANGLE	77"	82"	87"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	3/8" x 6"	3/8" x 6"	3/8" x 6"
POWER ANGLING RAMS	1 1/2" x 10"	1 1/2" x 10"	1 1/2" x 10"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	603 lbs.	614 lbs.	649 lbs.



**PUT SNOW IN ITS PLACE**



# HINIKER

## *Stainless Steel Tilt-Lift Plows*

1700 SERIES



**The blade tips forward as it is raised** allowing truck headlights to shine over the plow.



**26" tall stainless steel moldboard** plows and stacks with ease. Torsion trip edge provides protection on irregular surfaces.



## *Eliminate* Plow-Mounted Headlights!

Take advantage of the power of your truck's O.E.M. headlight system with the new Hiniker 1700 Series Tilt-Lift plow. The unique Hiniker lifting action tilts the plow blade forward as it is raised, keeping the moldboard below the level of the truck lights and eliminating the need for auxiliary headlight installation and maintenance.

This is a full-featured plow with a 26 inch tall torsion trip-edge moldboard and a stainless steel surface. Hydraulic power angling and lift along with built-in stacking ability and commercial quality hydraulic and electrical components make it ideal for property owners who want to do their own winter maintenance!

### **TILT-LIFT PLOW** *Specifications:*

MODEL	1700SS	1750SS
OVERALL WIDTH	84"	90"
MOLDBOARD HEIGHT	26"	26"
WEIGHT (STAINLESS STEEL) (NET OF TRUCK MOUNTED HARDWARE)	464 lbs.	476 lbs.



**PUT SNOW IN ITS PLACE**



# HINIKER Mid-Size

700 SERIES



Mid-Size

- Fully hydraulic controls
- Low maintenance full-trip moldboard
- Exclusive Hiniker Quick-Hitch mounting system

Super-bright quad halogen headlights have up to twice the power of typical sealed beam lamps.

Hydraulic scissors lift cuts transport bounce, eliminates lift chains.

6 Vertical and 2 diagonal ribs provide strength and support.

Full moldboard trip system helps protect plow and truck.

Low-maintenance poly (or stainless steel) moldboard surface reduces friction, never needs painting. Optional rubber or polyethylene snow deflectors.

Fully hydraulic lift and angling system.

$\frac{3}{8}$ " x 6" high-carbon steel replaceable cutting edge.



Get the reliability and convenience that Hiniker Mid-Size plows are famous for, now in your choice of either HDPE or Stainless Steel moldboards! Hiniker 700 Series plows are built for homeowners and small businesses who do their own winter property maintenance. Commercial quality lights, wiring, controls, and hydraulic components provide unparalleled reliability in a compact plow.

## MID-SIZE PLOW *Specifications:*

MODEL	702	752	702SS	752SS
BLADE WIDTH	7' (76" at full angle)	7 ½' (82" at full angle)	(84" at full angle)	(90" at full angle)
BLADE HEIGHT	26"	26"	26"	26"
MOLDBOARD SURFACE	¼" HMW Black Polyethylene	¼" HMW Black Polyethylene	Stainless Steel	Stainless Steel
CUTTING EDGE	$\frac{3}{8}$ " x 6" x 84"	$\frac{3}{8}$ " x 6" x 92"	$\frac{3}{8}$ " x 6" x 84"	$\frac{3}{8}$ " x 6" x 92"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	449 lb.	460 lb.	494 lb.	508 lb.



# HINIKER *Conventional*

7000 SERIES



Also available in 12 ga. Stainless Steel (7812SS & 7912SS).

The high-tensile steel superstructure of the moldboard provides exceptional resistance to bending and bowing, for extra heavy-duty applications.

**Super-bright** quad halogen headlights have up to twice the power of typical sealed beam lamps.

Externally mounted pump simplifies installation, comes off the truck with the plow.

Slick 1/4" HMW poly moldboard surface resists dents, never needs paint.

30-inch tall high curve, high-density polyethylene moldboard is dent-resistant and corrosion-free. Snow flows easily for more efficient plowing. Optional rubber or polyethylene snow deflectors.

Split-trip edge allows right and left side cutting edges to trip independently.

Available long-lasting ductile iron skid shoes.

## The **ULTIMATE** Performance With Hiniker Trip-Edge Straight Plows

The horizontal-truss moldboard design provides incredible strength, durability and resistance to bowing. The corrosion-proof HDPE poly moldboard is dent-resistant with less surface friction for easier plowing and greater efficiency. Protection is provided by Hiniker's exclusive split trip-edge design.



- **High clearance split trip-edge**
- **Extra strength trussed moldboard frame**
- **Super-bright quad halogen headlights**
- **Exclusive Hiniker Quick-Hitch 2 mounting system**



**High clearance split trip-edges** operate independently of one another, reducing stress and twisting forces on the plow.




**Convenient, compact fingertip control** mounts anywhere or can be hand held.

## 10 Foot Plow

Get professional plowing performance for your Ford F450/F550, GM 4500/5500 or Dodge 4500/5500. Extruded polyethylene snow deflectors are included as standard equipment.

- **32" Tall high-capacity moldboard**
- **Corrosion-free, dent-resistant black HDPE polyethylene surface**
- **14 Rib welded moldboard frame**
- **Two-section split trip edge with 6 trip springs for maximum protection**
- **8 inch cutting edge—1/2 inch thick**

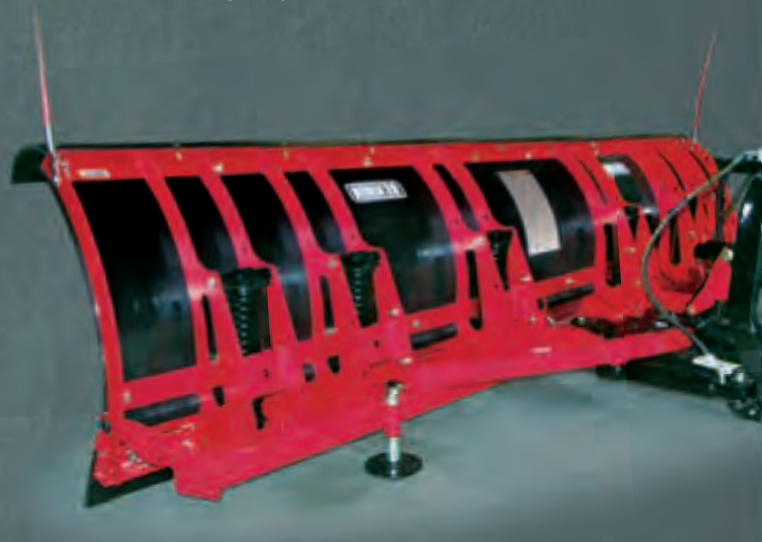

## CONVENTIONAL PLOW *Specifications:*

MODEL	7812	7912	7812SS	7912SS	10331
BLADE WIDTH	8'	9'	8'	9'	10'
BLADE HEIGHT	30"	30"	30"	30"	32"
VERTICAL RIBS	6	6	6	6	14
COMPRESSION TRIP SPRINGS	—	—	—	—	6
TORSION TRIP SPRINGS	6	6	6	6	—
PLOW WIDTH @ 30° ANGLE	83"	93"	83"	93"	103"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	6"	6"	6"	6"	1/2" x 8"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	720 lb.	777 lb.	777 lb.	825 lb.	938 lb.

**Conventional**



H I N I K E R

# *Stainless Steel Tailgate Spreader*

S P R E A D E R S

- High-quality brushed-finish 304 stainless steel hoppers in 6 and 10 cubic foot capacities.
- “No-Dribble” bubble auger design means the flow stops when the auger stops.
- Superior design, construction, and components in a contractor-duty spreader.



Optional swing-away hitch provides convenient access to the truck bed & tailgate. (Shown on Model SS1000)



Optional vibrator helps keep material moving.



Convenient in-cab variable speed controller with blast control and control for optional vibrator.

## *Professional Quality* “No-Dribble” Flow Control Spreader

The Hiniker stainless steel tailgate spreader provides optimum control for material spreading applications. The specially designed auger system prevents material from dribbling and leaking through the spreader when the motor is stopped. Two capacity options are available to meet specific application needs. Stainless steel construction and durable design mean reliability and performance season after season.



# Attachment Kits for HINIKER 600 & 1000 Stainless Steel Tailgate Spreaders

## Category 1 Three-Point Hitch Mount



**Trailer Kit**  
*(for off-highway use only)*

## Skid-Steer Mount Kit for Universal Mount Plate



**UTV Bed Rail Mount Kit**

**Spreaders**

### TAILGATE SPREADER *Specifications:*

	MODEL SS600	MODEL SS1000
LEVEL CAPACITY	6 Cubic Foot	10 Cubic Foot
NET WEIGHT	105 lb.	130 lb.



**PUT SNOW IN ITS PLACE**



# HINIKER

## *Dual-Motor Electric Auger Delivery*

### SPREADERS

- Dual 12-volt motors independently power the auger and spinner
- Standard Steel Hopper Screens
- Standard Electric Hopper Vibrator
- 2.0 cubic yard level capacity
- Optimally sized for use in either a 6.5 ft. or 8 ft. pickup bed



## ***Efficient,* Accurate Low-Maintenance Delivery System**

Hiniker Dual-Motor Electric Auger Spreaders use an efficient 5.75-inch diameter auger conveyor system to provide positive delivery control with no material carry-back into the truck bed. With no conveyor chain, far fewer bearings, and 12-volt electrical motor power, maintenance needs are cut to a minimum. Two electric motors provide independent variable speed control of the auger and the spinner for precise rate and pattern control.





Convenient tip-up spinner assembly for unloading unused material and easy trailer hitch access. Standard or extended chute length.



Electric hopper vibrator helps prevent bridging of material. Optional on conveyor delivery spreaders and standard on auger delivery models.



### Hiniker Control Console

- Individual variable speed control of conveyor and spinner
- Blast control for quick, extra-dense application
- Reverse switch to clear jams
- Built in diagnostics and overload protection
- Vibrator Switch



Hopper screens are optional on conveyor delivery spreaders and standard on auger delivery models. Removable hopper cover tarps are optional on all models.

## Model 975

- 4 cubic yard capacity

## Model 955

- 2.75 cubic yard capacity



## SPREADER Specifications:

### DUAL-MOTOR ELECTRIC AUGER

	MODEL 775	MODEL 955	MODEL 975
LEVEL CAPACITY	2.00 Cubic Yards	2.75 Cubic Yards	4.00 Cubic Yards
LENGTH	100" Overall 91" Hopper	122" Overall 111" Hopper	122" Overall 111" Hopper
TOP WIDTH	51.0"	51.0"	51.0"
VIBRATOR	Standard	Standard	Standard
REMOVABLE HOPPER COVER TARP	Optional	Optional	Optional
HOPPER SCREENS	Standard	Standard	Standard



# HINIKER

## Dual-Motor Electric Conveyor Delivery

### SPREADERS

- **Dual Electric Drive Motors** independently power the conveyor and spinner
- **Stainless Steel Construction**
- **Adjustable Stainless Steel Inverted vee**
- **Optional Steel Hopper Screens**



#### Hiniker Control Console

- Individual variable speed control of conveyor and spinner
- Blast control for quick, extra-dense application
- Reverse switch to clear jams
- Built in diagnostics and overload protection
- Vibrator Switch



Electric hopper vibrator helps prevent bridging of material. Optional on conveyor delivery spreaders and standard on auger delivery models.



Convenient tip-up spinner assembly for unloading unused material and easy trailer hitch access. Standard or extended chute length. Available on all Hiniker Dual-Motor Electric and OHV Gas Engine Spreaders.

## Precision Controlled *Accurate* Applications

Spread ice control materials quickly and easily with an efficient Hiniker spreader. Snow removal contractors looking for additional profits will find them in ice control.

Tailor your material application rates accurately with Hiniker 635 & 835 Dual-Motor Electric Conveyor Spreaders. Hiniker's convenient in-cab console provides individual variable speed control for both the conveyor and spinner. Two electric motors offer quiet operation in residential and office areas, plus no downtime for refueling. A 25-ft spread pattern and big 1.50 or 1.80 yard capacities mean you'll spend your time productively, rather than constantly reloading.



# HINIKER

## *OHV Gas Engine*

# Conveyor Delivery

SPREADERS

- Available in 6.5' & 8' hopper lengths
- Corrosion-resistant stainless steel construction
- In-cab electric control of starter, throttle, and clutch functions
- Briggs & Stratton Intek AVS OHV engine



Spreaders



Hopper screens are optional on conveyor delivery spreaders and standard on auger delivery models. Removable hopper cover tarps are optional on all models.

## SPREADER *Specifications:*

	DUAL-MOTOR ELECTRIC CONVEYOR		OHV GAS ENGINE CONVEYOR	
	MODEL 835	MODEL 635	MODEL 825	MODEL 625
<b>LEVEL CAPACITY</b>	1.80 Cubic Yards	1.50 Cubic Yards	1.80 Cubic Yards	1.50 Cubic Yards
<b>LENGTH</b>	115" Overall 96" Hopper	97" Overall 78" Hopper	115" Overall 96" Hopper	97" Overall 78" Hopper
<b>TOP WIDTH</b>	50.5"	50.5"	50.5"	50.5"
<b>MAX APPLICATION RATE</b>	5 cu. ft./min	5 cu. ft./min	7.3 cu. ft./min	7.3 cu. ft./min
<b>VIBRATOR</b>	Optional	Optional	N/A	N/A
<b>REMOVABLE HOPPER COVER TARP</b>	Optional	Optional	Optional	Optional
<b>HOPPER SCREENS</b>	Optional	Optional	Optional	Optional




# HINIKER *Accessories*

MAXIMIZE  
PERFORMANCE



### Rubber Snow Deflectors

Flexible rubber snow deflectors are designed to keep blowing snow out of the driver's sightline, while providing flexibility when carrying or stacking big loads. Add a spring kit for additional rigidity.



### Polyethylene Snow Deflectors

Semi-rigid polyethylene provides a slick surface for enhanced snow flow. Adaptable to all Hiniker plows except the C-Plow.



### Wear Bars

Save time and reduce maintenance costs with a set of abrasion-resistant chromium alloy wear bars. Get as much as three times the normal cutting edge wear life. (Standard on 7812/7912 Series)



### Curb Guards

Wrap-around curb guards protect the ends of your plow from excessive wear, helping prevent expensive repairs. Available for all Hiniker plows.

Also available with integrated chromium alloy wear bars for enhanced cutting edge life. (Standard on 9200 V-Plows)




### Box Ends

Capture snow with a set of Hiniker box ends. Recommended for best backdragging efficiency with the Hiniker C-Plow. (Not available for V-plows, Scoop plows or Mid-Size series plows.)



### Flexstand

Make the most user-friendly controller in the industry even better with a Hiniker Flexstand. Easy to install, a convenient magnetic mount allows quick removal when not needed.



### Snowplow Emergency Transport Strap

In the unlikely event of hydraulic or electrical failure, this handy strap will hold the plow up in the transport position while driving back to the shop.



### V-Plow Box Wings

**For Models 9851, 9860, 9951, 9960, 9285, 9295, 9385 & 9395.**

Add more carrying capacity to your Hiniker V-Plow.

Designed for quick single-pin installation on each side of the plow, they are easily removed for transport or for conventional plowing.

*Shown on flared wing.*



*Shown on flat-top plow.*





### **Rubber Cutting Edges**

Protect expensive brick, cobblestone, and embossed surfaces with a Hiniker rubber cutting edge. Comes complete with attaching hardware.

Available for all models except V-plows.



### **1/2" Steel Cutting Edges**

Get extra wear in heavy use with 1/2" thick replacement cutting edges. Available as replacement parts for all Hiniker plows except the 700 Mid-Size Series.



### **Skid Shoes**

Standard equipment on 2000, 6000 & 8000 Series plows, these long-lasting cast ductile iron skid shoes may also be ordered and installed on the 700, 1700, 7000 and the 9200 Series Plows.



### **Emergency Parts Kit**

Contains several of the most commonly needed repair parts, including pins, a hydraulic hose, solenoid coil, headlight relay, and hydraulic fluid.



### **Hiniker Cold Flow Hydraulic Fluid**

Ensure maximum cold weather performance with genuine Hiniker Cold Flow hydraulic fluid. Minus 60 degree pour point ensures faster, more efficient operation in all types of weather.



### **Genuine Hiniker Replacement Parts**

Maintain your Hiniker Equipment with genuine Hiniker factory replacement parts. Get the exact spec and fit you need for top performance.



**PUT SNOW IN ITS PLACE**

# HINIKER Skid Steer Plows

**C-PLOW**



**Conventional**

**Full Trip Steel Blade**

- Tubular box-section frames
- Reinforced 30-inch high 12-gauge moldboard
- Moldboard floats and oscillates to clean uneven surfaces
- Full moldboard trip with dual compression springs
- Universal mounting plate attachment
- Abrasion-resistant sheathing protects hydraulic hoses



**10 Foot Trip Edge Poly Blade**

- Model 2103 features 32" tall high capacity moldboard



Corrosion-free, low-friction poly moldboard surface



- Compare Speed and efficiency. The C-Plow lets you move more snow in less time.
- Converts from a conventional plow to a backdrag plow with the touch of a button.
- Complete snow removal without a separate backdrag plow or loader.

Get the performance of a conventional plow and the added versatility of a backdrag plow in a single unit. Cut through snow with the power of a conventional plow. Then, with push-button ease, capture and pull snow as the blade transforms into a backdrag plow. Tight spaces, building edges, loading docks, curbs and corners are cleared quickly and easily.



U.S. Patent No. 6,314,666

**Specifications:** Series 2275/2280/2285/2103

MODEL	BLADE WIDTH	BLADE MATERIAL	WEIGHT	TRIP SPRINGS	CUTTING EDGE
2275	7½'	12 GA. Steel	559 lb.	2	¾" x 6"
2280	8'	12 GA. Steel	570 lb.	2	¾" x 6"
2285	8½'	12 GA. Steel	605 lb.	4	¾" x 6"
2103	10'	¼" HMW Poly	894 lb.	6	½" x 8"

**Specifications:** Series 2881/2891

BLADE HEIGHT	BLADE THICKNESS	WEIGHT	COMPRESSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL) BOTTOM	CUTTING EDGE (1044 STEEL) TOP
30"	¼" HMW Poly	8' - 792 lb. 9' - 827 lb.	4	¾" x 6"	½" x 4"




# V-PLOW



- Torsion spring trip-edge protection
- Two-way hydraulics provide full moldboard control in Vee, scoop, left, right or straight modes
- Box-section steel-tube frame for long-term strength
- Abrasion-resistant sheathing protects hydraulic hoses from wear
- Universal mount plate for easy hook-up

Slick HMW Poly Surface.

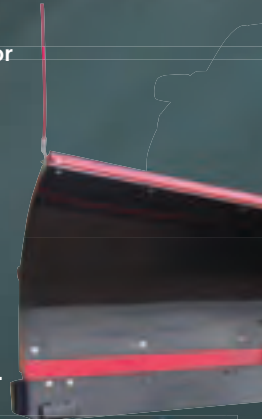

Floating, oscillating moldboard stays on the ground in uneven terrain.


## Specifications: Series 29285/29295

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	TORSION TRIP SPRINGS
30"	8½' 9½'	¼" HMW Poly	677 lb. 716 lb.	6

# SCOOP



- 20° Fixed-angle outer ends
- Conventional plow weight and simplicity
- V-Plow capacity and efficiency

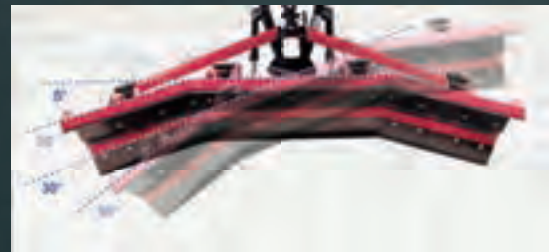

Concave shape captures snow to efficiently clear lots and parking areas. Angles left or right for conventional plowing.

Outer end is angled forward at 50° in full left or right position, reducing high-side spillage.

## Specifications: Series 2682/2692

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	TORSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL)
30"	8' 9'	¼" HMW Poly	705 lb. 759 lb.	6	6"

# HINIKER *Skid Steer Snow Pushers*

3600 SERIES



**Hiniker 3600 Series** snow pushers combine the simple efficiency of a box-type snow pusher with the quality and durability that Hiniker is known for. A durable rubber cutting edge provides superior cleaning on paved surfaces while heavy-duty steel skids carry the pusher over uneven surfaces. 3/8 inch thick steel sides are 36 inches deep for plenty of snow moving capacity. Utilizes the skid-steer universal attachment system.

An **Optional Pull-back attachment** bolts on easily, adding a second rubber cutting edge and rubber side seals for efficient backdrag performance.



## *Specifications:* Series 3600 Snow Pushers

MODEL	OVERALL WIDTH	OVERALL HEIGHT	DEPTH	WEIGHT-PUSHER ONLY	WEIGHT-w/PULLBACK
3608	96"	36"	36"	836 lb.	1,031 lb.
3610	120"	36"	36"	917 lb.	1,140 lb.



**PUT SNOW IN ITS PLACE**



# HINIKER 6', 7' & 7 1/2' LOADER SNOWPLOWS for compact utility tractors



- Full-trip 26 inch tall moldboard
- Full 27 degree left and right rotation
- Choice of manual or hydraulic angle control
- Durable, corrosion-proof HMW poly surface
- Floating design follows uneven terrain
- Quick-tach universal skid steer type mounting plate

Easy hook-up to any loader equipped with a skid steer universal attachment plate. Dual springs provide full trip protection. Six horizontal and two diagonal ribs strengthen the moldboard.



Oscillating, floating design follows uneven and rutted surfaces for cleaner plowing. Slick HMW poly moldboard is dent-resistant and corrosion free.

*Now available with universal skid-steer style mount or John Deere loader mount.*



## Specifications: LOADER SNOWPLOW Series 260/270/276

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL) BOTTOM
26"	6'	1/4" HMW Poly	397 lb.	2	3/8" x 6"
26"	7'		429 lb.	2	3/8" x 6"
26"	7 1/2'		436 lb.	2	3/8" x 6"



**PUT SNOW IN ITS PLACE**

**Loader Snowplows**





## Truck mounted plow specs


	HINIKER PLOWS	MODEL	BLADE WIDTH (FT)	BLADE HEIGHT (IN)	MOLDBOARD SURFACE	WEIGHT (LBS) (REMOVABLE)	
HIGH-PERFORMANCE TRIP-EDGE	<b>Torsion-Trip SCOOP PLOW</b>	6812	8'	30"	¼" HMW Poly	749	
		6912	9'			803	
	<b>Torsion-Trip V-PLOW</b>	9385	8½'	30-37"	¼" HMW poly	797	
		9395	9½'	30-38"		830	
	<b>C-PLOW</b>	8802	8'	30"	¼" HMW poly	800	
		8902	9'			835	
	<b>CONVENTIONAL PLOW</b>	7812	8'	30"	¼" HMW poly	720	
		7912	9'			777	
		7812SS	8'	30"	Stainless Steel	777	
		7912SS	9'			825	
		10331	10'	32"	¼" HMW poly	938	
	FULL-TRIP	<b>CONVENTIONAL PLOW</b>	2753	7½'	30"	12 GA Steel	603
			2803	8'			614
			2853	8½'			649
		<b>MID-SIZE PLOW</b>	702	7' (76" at full angle)	26"	¼" HMW poly	449
752			7½' (82" at full angle)	460			
702SS			7' (84" at full angle)	Stainless Steel		494	
752SS			7½' (90" at full angle)			508	
TILT-LIFT		<b>TILT-LIFT PLOW</b>	1700SS	84"	26"	Stainless Steel	464
	1750SS		90"	476			

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY. WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.



### SCAN ME.

Use your QR code reader on your smartphone to find out more about Hiniker snow and ice equipment.



TORSION-TRIP V-PLOW



SKID-STEER SNOW PUSHER



AUGER SPREADER

HINIKER COMPANY  
58766 240 St • P.O. Box 3407 • Mankato, MN 56002-3407  
Phone (507) 625-6621 • (800)-433-5620 • Fax (507) 625-5883

[www.hiniker.com](http://www.hiniker.com)